




EXTRUSION HEADS

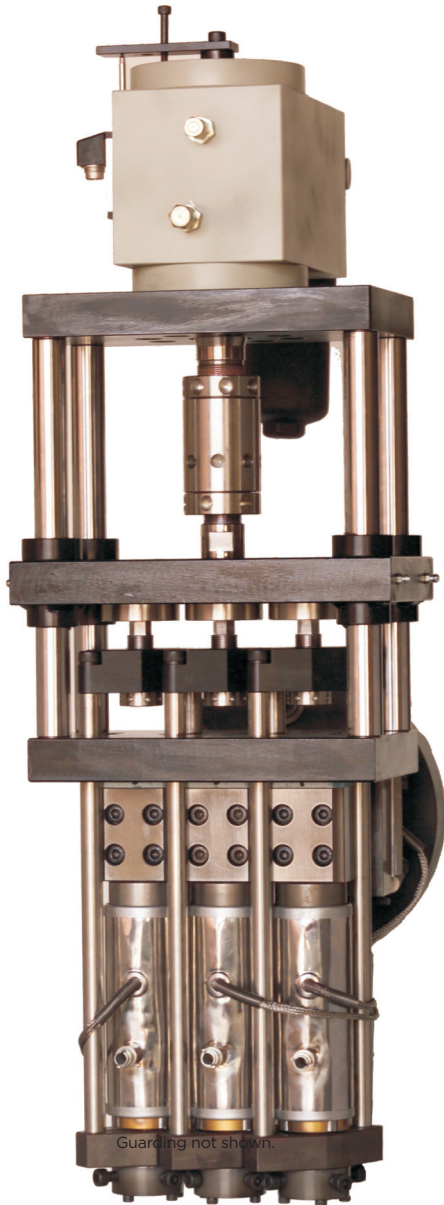

FEATURES/OPTIONS

- 1 to 8 parison heads available at various center distances
- Die diameter sizes ranging from 25mm to 125mm
- Heads available in spiral mandrel, 2-legged torpedo, and “penola” type designs
- 80mm or 120mm hydraulic programming cylinders with high pressure filtering system
- Moog servo valves
- LVDT or DCDT transducers
- Manual die gap adjustment
- Solid block directional flow block construction
- Interchangeability of PE Spiral mandrels with PVC Torpedoes
- TiN coating on guide rings and torpedoes
- Head construction features stainless and tool steels (ex: AiSi 420 & P20)
- PE-PVC-PP-PETG Processing available

HEADS ARE COMPATIBLE WITH:

- | | |
|-------------|-----------|
| • Heins PCM | • Uniloy |
| • Bekum | • Magic |
| • Automa | • B&W |
| • Techne | • Fischer |

Note:

Due to a company policy of continuous improvement, Compact Mould reserves the right to alter technical specifications without prior notice.